


Circulation & Stir Fans

Hired-Hand's line of various stir fans continue the tradition of being an industry leader in performance from all areas of ventilation equipment. Top of the line materials and state-of-the-art design go into making both our Mega Flow Round Stir Fan as well as the Orifice Stir Fan line. Each are offered in model sizes ranging from 36" to 52" in diameter. In addition to the two types of large scale stir fans mentioned above, Hired-Hand is also proud to offer two other lines that will fit any agricultural need. Both our HAF Fans and our Funnel Flow Stir Fan offer the same great features and benefits standard on each and every fan model we manufacture. The importance of stir fans for both summer and winter time ventilation is known industry wide. And Hired-Hand has you covered for all of your stir fan needs.

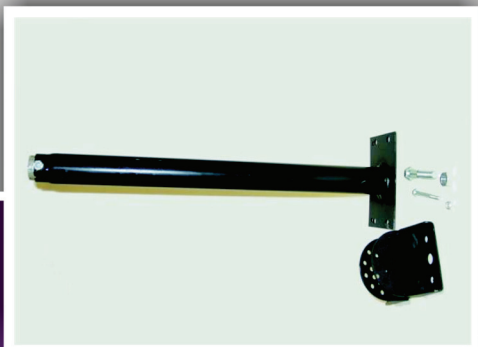

Post Mount Kits available on all Round Stir Fans and Mega Flow Orifice Fan Models.

Mega Flow Round Stir Fan Features:

- 36" and 48" direct drive models available
- corrosion resistant housing and wire guard
- strongest post mount bracket in the industry
- long life efficient ball bearing motors

Mega Flow Orifice Fan Features:

- standard with powertwist, v-belt optional
- optional self adjusting belt tightener
- galvanized venturi, frame and blade
- brackets for optional hanging

Available Models:

- ~ 36" Single Phase Round Stir Fan
- ~ 36" Three Phase Round Stir Fan
- ~ 48" Single Phase Round Stir Fan
- ~ 48" Three Phase Round Stir Fan

- ~ 52" Mega Flow Orifice Fan
- ~ 52" Mega Flow Orifice Fan with Overload Protector


- ~ 20" HAF Circulation Fan

- ~ 24" Funnel Flow Stir Fan


- ~ 24" Mega Flow without Housing (Shown Above)



HAF Circulation Fan



Mega Flow Orifice Fan



Mega Flow Round Stir Fan



Fannel Flow Stir Fan

Fan Model	Drive	Phase	Accessories	Static Press.	CFM	CFM/Watt	RPM
Funnel Flow Stir Fan	Direct	Single		0.05"	5,067	11.6	1,096
36" Round Stir Fan	Direct	Single		0.05"	9,726	18.8	845
48" Round Stir Fan	Direct	Single		0.05"	16,612	21.6	848
52" Mega Flow Orifice Fan	Belt	Single		0.05"	26,035	17.3	422
			Belt Tensioner	0.05"	25,724	18.6	412
		Three		0.05"	26,063	18.4	419
			Belt Tensioner	0.05"	25,785	19.3	408

- single phase testing - 230 volt, 60Hz
- three phase testing - 208-230/460 volt, 60Hz
- all tests results are subject to change without notice
- refer to www.hired-hand.com for updated data



Hired-Hand, Inc.
 P.O. Box 99
 1733 County Road 68
 Bremen, Alabama 35033
 Fax 1-256-287-2000

1-800-642-0123

www.hired-hand.com